



THE LEADER. SINCE 1961.



2018





In conjunction with golf course superintendents, Turfco introduced the first mechanized topdresser in 1961. This invention sparked over 50 years of turning customer insight into topdresser innovation. Today's lineup of Turfco equipment represents the latest technology available for improving turf health and playability. Turfco topdressers give you unprecedented flexibility and performance to deliver the exact spread you need, all while keeping operator control simple and intuitive. **INVENTION. INSIGHT. INNOVATION.**



★ ★ ★
★ 1961

Turfco introduces the first mechanized topdresser.

★ 1993

Patented Chevron® belt revolutionized topdressing.

★ 1991

Turfco introduces 3 Year Warranty—yet to be matched by any competitor.

★ 1981

Patented ground-drive system introduced on Mete-R-Matic® topdresser.

★ 2006

Patented TriWave™ Overseeder revolutionizes seeding.

★ 2002

Patented WideSpin™ technology introduced for quick, light and consistent application.

★ 2009

Patented Electronic Controller introduced with new WideSpin™ 1540 EC, delivering unprecedented control, performance and ease-of-use.

★ 2011

Turfco celebrates 50 Years of inventing the topdresser.

★ 2013

Turfco introduces the all new redesigned WideSpin™ 1550 and the new TriWave™ 40 changes the world of seeding.

★ 2014

Turfco introduces the Torrent™ Debris Blower, specially designed for golf courses and sports fields.

★ 2016

Turfco introduces the Torrent™ 2 with MagnaPoint™ technology and the TriWave™ 45 Overseeder.



The Turfco Product Line

As golf course maintenance practices have changed and grown, so has our product line. Your topdressing program is likely tailored to the specific needs and conditions of your course and we understand that no two golf courses are the same. Our expansive product line ensures that we have the right seeder, topdresser and material handler and debris blower for your specific program. With Turfco turf maintenance equipment, you'll have the freedom to focus on your program rather than trying to adapt your program to what your equipment can do. Take a look through this catalog to discover all the things you can accomplish on your course with Turfco equipment.

Three-Year Warranty

Turfco equipment is not only innovative, it is built to withstand the tough demands of day-to-day operations. That's why we offer an unprecedented three-year warranty against defects on all topdressers used for commercial applications. You won't find a better warranty from any other topdresser or material handling company in the industry. Period.



Worldwide Dealer Network

For a hands-on demonstration of any Turfco equipment, contact us today. We'll put you in touch with the Turfco dealer nearest you. Simply call us toll-free at **800-679-8201**.

TABLE OF CONTENTS

4 TriWave™ Series Overview	13 Mete-R-Matic® IV
5 TriWave™ 45 Overseeder	14 Mete-R-Matic® XL
6 TriWave™ 60 Overseeder	15 Mete-R-Matic® Self-Propelled
7 Widespin™ Series Overview	16 CR-7 Topdresser & Material Handler
8-9 Widespin™ 1550	17 Edge-R-Rite® II Edger
10-11 Torrent™ 2 Debris Blower	18-19 CR-10 Topdresser & Material Handler
12 Mete-R-Matic® Series Overview	

TriWave™ Series: The Next Wave in Seeding is Here.

NEW



TriWave™ 45



TriWave™ 60

TriWave Working directly with golf course superintendents, Turfco® designed the innovative **TriWave™ 60 Overseeder**. In 2016 the innovation continued with the introduction of the **TriWave™ 45 Overseeder**. Now you can get enhanced seeding performance with an evolutionary model that hooks up to your favorite turf vehicle.

TriWave's 1½-inch seed spacing, combined with three independent floating heads, greatly increases germination by following the contours of the terrain for consistent seed depth. Its WaveBlade technology creates clean, optimal slit widths for better seed-to-soil contact while keeping turf disruption to a minimum. The patented

delivery system places seed directly into the slit, reducing waste while further increasing germination. And, seed depth can be infinitely adjusted in the field to suit the needs of each situation.

If you want to get great germination with less disruption, demo a TriWave Overseeder. As with the many superintendents who helped in its development, you'll find the TriWave truly makes a difference on your course.

- Patent-pending floating heads follow the ground contour—you won't miss the low spots or destroy the high spots or unmarked sprinkler heads.




- Patented seed delivery system puts seed directly into the slit, reducing waste and increasing germination.
- Patented WaveBlade technology, counter-rotating at 900RPM, creates a clean, optimal square slit while minimizing turf disruption.
- Patented depth adjustment allows for infinite, in-field adjustment to suit your specific needs. No tools required.
- Close, 1½-inch spacing increases germination with fewer passes.




Allows cross-seeding with minimal disruption.



Patent-pending seed diverter increases germination by placing seed directly into the slit.



Traditional overseeders create a v-shaped slit, causing inconsistent contact that the seed has with the soil.



The TriWave maximizes seed to soil contact at the right depth with a square slit that quickly closes.



WaveBlade technology creates optimum clean slits, increasing seed-to-soil contact.



Minimal disruption to turf.



Go Green Anywhere on Your Course

Damaged turf on your #7 tee? Weak areas on your #2 and #12 greens? Want to improve the overall stand of grass on your high traffic areas? With the TriWave™ 45, greening up your course has never been easier or quicker. You can go green now—you don't have to wait for the grass to come back next season. Just hook it up to your turf vehicle and quickly seed all your trouble spots in one trip. No tools are required to quickly adjust seed rates and depths to match the conditions you need. Now's the time to take your course to the next level.

- Hooks up to your favorite turf vehicle and seeds while you turn so you can follow greens, collars and contours. No tractor or PTOs required.
- Dual 18-inch floating heads follow the contour of the ground while the patented seed delivery system works with the WaveBlade technology to optimize seed-to-soil contact with minimal turf disruption.
- Close, 1½-inch spacing increases germination with fewer passes.
- Easy to switch out green blades and fairway blades.



Patented floating heads follow the contour of the ground, optimizing seed-to-soil contact for better germination.



Proven 30 percent higher germination results vs traditional methods. Better germination with less seed.



Quick-adjust depth control allows you to get the right seed depth in varying conditions.

Specifications

Model	TriWave 45 Overseeder w/ Fairway Blades (comes standard) (#85858) TriWave 45 Overseeder w/ Green Blades (optional) (#85859)
Width	66" (1.67 m)
Height	56.5" (1.43 m)
Length	80.5" (2.05 m)
Capacity	3.2 ft³ (0.09 m³) Approx. 50 lb of grass seed
Application Pattern	Seed spacing 1 ½" (38.1 mm) apart
Application Width	40" (1.01 m)
Seed Gate	Automatic operation, adjustable variable opening
Ground Speed	Operating Speed: 3 MPH (4.8 km/h)
Transport Speed	Up to 6 MPH (9.6 km/h) (maximum)
Productivity	1.21 acres per hour at 3 MPH
Cutting Heads	2 heads, independently floating
Blade Assembly	2 WaveBlade sets, total 20 blades
Blade Assembly Operating Depth Range	0 to 1 ¾" (0 to 34.9 mm)
Engine	25 HP Briggs and Stratton Vanguard with electric start and 20 AMP charging system
Drive	Electric clutch with double groove V-belt
Hitch Type	Standard 5/8" pin, equipped with jackstand and safety chains
Weight	1,070 lb (485 kg) <i>hopper empty</i>
Optional	<ul style="list-style-type: none"> • Hydraulic Power Kit (HPU) (hose kit not needed when equipped with HPU) (#86196) • Hydraulic Hose Kit for use with Cushman Truck (#86186) • Hydraulic Hose Kit for use with Toro or John Deere Trucks (#86187)

Specifications subject to change without notice.



TriWave technology creates optimum slits for improved seed-to-soil contact, while minimizing turf disruption.



Cover More Ground with Better Germination Rates

Golf course superintendents told us they wanted a seeder with better germination rates, but minimal turf disruption. Four patents later, the TriWave™ 60 delivered on that promise. Three floating heads follow the contour of the ground while the unique seed delivery system works with the WaveBlade technology to optimize seed-to-soil contact for maximum germination rates—all while minimizing turf disruption.

- 60-inch application width combines with close, 1½-inch spacing to give you the most productive, high-germination rate seeder available.
- Depth adjuster allows you to adjust to varying conditions or seed types in the field without tools.
- Patented floating heads and WaveBlade technology combine to ensure you won't damage sprinkler heads or other unmarked items.



Depth adjuster allows you to adjust to varying conditions or seed types.



Unmarked items will be undamaged.



Floating heads follow the ground contour.

Specifications

Model	TriWave 60 Overseeder (#85851)
Width	74" (1.88 m)
Height	51" (1.3 m)
Length	40" (1.02 m) <i>without PTO shaft</i>
Capacity	4.77 ft³ (8,251 in³)
Application Pattern	Seed spacing 1 ½" (38.1 mm) apart
Application Width	60" (1.52 m)
Seed Gate	Manually operated, variable opening
Ground Speed	Up to 5.5 MPH (8.85 km/h)
Productivity	Up to 3 acres per hour
Cutting Heads	3 heads, independently floating
Blade Assembly	3 WaveBlade sets, total 30 blades
Blade Assembly Operating Depth Range	0 to 1 ¾" (0 to 34.9 mm)
Tractor/Horsepower Requirements	35 HP minimum to 60 HP maximum (26.1 kW to 44.7 kW)
Drive	540 PTO (tractor)
Hitch Type	Category 1 or Category 2, 3-pt. hitch
Weight	1,150 lb (521.6 kg) <i>hopper empty</i>
Maximum Weight with Seed Hopper Full	Approximately 1,250 lb (567 kg)

Specifications subject to change without notice.

WideSpin™ 1550 Broadcast Topdresser : The Best Spread in the Industry.



The Turfco Edge: The Innovation Continues

The **Turfco Edge** started with listening to what frustrates superintendents when it comes to topdressing. We heard they were tired of doing wheel-to-wheel spreads, overlapping spreads, dealing with complicated mechanical adjustments, and wasting time checking in with their crews to verify spread settings.

The **WideSpin™ 1550** solves these problems, and more. Calculating and knowing your rates is easier. Adjusting settings is easier. Saving preferred settings is easier. Loading is easier. Topdressing greens, approaches and tees at the same time is easier. And getting the exact spread you want, every time, is easier.

WideSpin 1550 topdressers are available in truck-mounted and tow-behind models with engine or hydraulic power options. You can also choose manual or electronic controls. Manual control models are easy to use and offer tremendous value for the money. Electronic control models give you greater flexibility, the widest range of rates and the ability to lock in up to four presets.



All new hopper redesign increases capacity up to 20 percent and makes loading even easier with the widest hopper in the industry.



Adjustable spinner angled down for better turf penetration.



Ultra-light spread application.



Medium spread application.



Heavy spread application.

WideSpin™ 1550 | Broadcast Topdresser



The Ultimate in Control and Precision


With the WideSpin™ 1550, we're laying down a whole new standard in topdressing control and precision.

The WideSpin 1550 features advanced technology that puts you in complete control of your topdressing program. You'll get the application rates you want, when you need them without leaving the seat.

- New patented controller allows you to calculate your rates while also giving you a wider range of rates to choose from. Lock in your favorites using the controller's four presets.
- New hydraulic system and spinner design makes the patented WideSpin technology even more versatile while delivering a consistent, even spread. Go from a superlight application to heavy, and everything in between.
- New hopper has 20 percent greater capacity and the widest opening in the industry—you'll refill faster and spill a lot less when you do.



With the Truck Mounted WideSpin 1550 everything is easily adjustable for maximum control—belt speed, spinner speed, spinner angle and metering gate—giving you the freedom to more quickly accomplish the specific topdressing programs you need to get done.

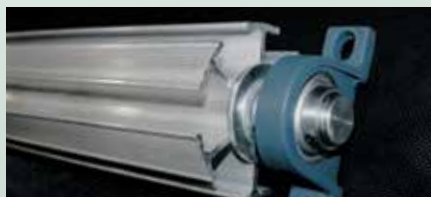

Eliminate belt stretch and breakage with the unique self cleaning roller. The only one with a 3-year warranty.



New hydraulic and spinner design makes the patented WideSpin technology even more versatile while delivering a consistent, even spread.



Allows you to calculate your rate so you get the rate you want—every time.



Lock in your width and rate control with the new four factory presets to get your perfect spread every time.


Save Time and Reduce Wear on Your Greens

Compared to other broadcast spreaders where the recommended application method is wheel-to-wheel, the 1550 with Turfco's patented WideSpin™ technology allows you to complete edge-to-edge applications.

This gives you the opportunity to:

- Decrease the number of passes on your greens by up to 720 times per year* when compared to the wheel-to-wheel method.
- Improve productivity and save time; unique 30-foot wide, even spread makes it possible to cover an average-size green in two passes.
- Dramatically reduce traffic on your greens, reducing the potential for soil compaction and hydraulic leaks.

* 18 greens, 10 times a year

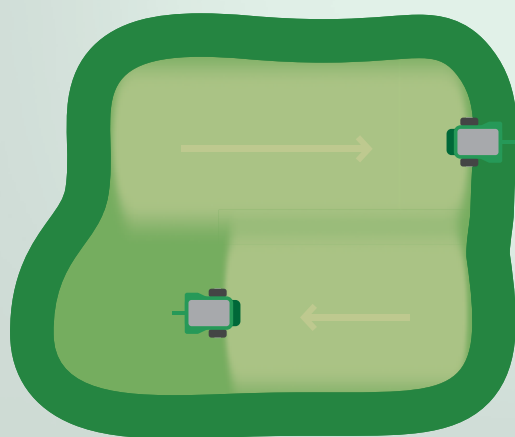

Turfco's WideSpin 1550 30-foot wide, even spread requires fewer passes.

Specifications

	TOW-BEHIND	TRUCK-MOUNTED
Model	ENGINE POWERED 1550 Electronic Control (#85828) 1550 Manual Control (#85829)	TORO, JOHN DEERE & JACOBSEN
	HYDRAULIC POWERED 1550 Electronic Control (#85824) 1550 Manual Control (#85825)	HYDRAULIC POWERED 1550 Electronic Control (#85822) 1550 Manual Control (#85823)
Engine	Engine Powered: 13 HP Briggs and Stratton Hydraulic Powered: n/a	n/a
Operator Control	Electric: 3-position switch; 4 programmable presets; onboard rate calculator; instantaneous belt and spinner speed control; instant throttle down control (Engine Powered) Manual: Standard 3-position switch with manual control	Electric: 3-position switch; 4 programmable presets; onboard rate calculator; instantaneous belt and spinner speed control Manual: Standard 3-position switch with manual control
Empty Weight	Engine Powered: 1,324 lbs (601 kg) Hydraulic Powered: 1,021 lbs (463 kg)	710 lbs without mounting kit (322 Kg)
Hopper Capacity	21 ft ³ (0.59 m ³) struck level; 25 ft ³ (0.71 m ³) heaped	
Hopper Size	80" x 36.5" (2.03 x 0.92 m) at the top	
Spreading Width	9' up to 40' (2.5 up to 12 m)	
Spread Application	0.45 ft ³ per 1,000 ft ³ up to 12 ft ³ per 1,000 ft ³ using patented WideSpin Technology	
Topdressing Speed	Up to 8 MPH (12.8 km/h)	
Transport Speed	Up to 8 MPH (12.8 km/h)	
Conveyor Belt	18" (0.46 m) wide pebble surface composition with heavy duty polyester cord	
Metering Gate	Manually operated with Light Spread/Heavy Spread Calibrations	
Drive	Engine Powered: Engine Powered Hydraulics Hydraulic Powered: Tow Vehicle Powered Hydraulics	Truck Powered Hydraulics
Wheels	4 Ply 26.5 x 14.00 x 12 Turf	n/a
Warranty	3 years	
Options	Trench Filling Attachment	Storage Stand & Trench Filling Attachment

Specifications subject to change without notice.

Torrent™ 2 Debris Blower | The New Standard in Blower Productivity.



NEW



TORRENT 2

Designed from the ground up with input from golf course superintendents, sports field managers and grounds managers, the Turfco® Torrent™ 2 debris blower takes cleanup to a new level of productivity. The powerful, patent-pending Turfco Torrent 2 delivers unprecedented control over air speed, air direction, noise


management and fuel consumption. It is a precision cleanup tool you can use year-round to give your course a new level of polish and playability.



The Turfco Torrent 2 blower features a faster, more precise nozzle rotation that's operated by a wireless handheld controller to dramatically increase operator productivity. The controller includes a unique idle/resume button and the ability to adjust air speed settings. Designed by Turfco, the Torrent 2's turbine generates powerful air volume and superior air velocity. From grass clippings and aeration cores on the course to leaves and pine needles in the parking lot, nothing stands in its way.

Learn how greater precision and control can make a blower more productive. Ask for a demo and compare the Turfco Torrent 2 to your current blower.

Save Hours a Day with MagnaPoint™ Technology

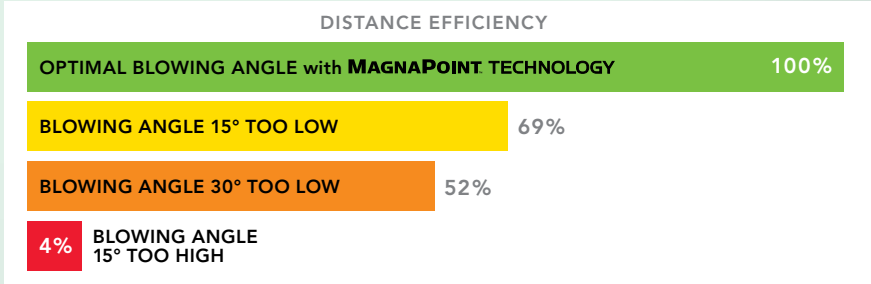

Patent-pending MagnaPoint™ Technology ensures your operator gets the most productive angle at every pass.

- On-board reference lets you select the optimal setting for the debris you are blowing
- Slide the magnetic stops to that angle
- The optimum blower angle each and every time
 - » Maximizes productivity
 - » Saves time
 - » Limits noise
 - » Reduces fuel consumption



Simple to set, right every time, job done faster.
See for yourself at turfco.com.

NEW OPTION – MagnaPoint™ Technology eliminates guessing with the optimum blower angle every time.



Aeration plugs on the fairway, leaves in the parking lot, debris doesn't stand a chance



Wireless handheld controller equipped with unique, time-saving idle/resume button.



Adjustable hitch.



Donaldson air filter.

Engineered for Control and Precision

- Wireless controller and new MagnaPoint™ Technology allows operator to dial in the exact nozzle direction for unprecedented precision.
- Fastest nozzle rotation speed in the industry dramatically increases productivity—no need to slow down to wait for the blower at the end of each pass.
- Multiple air speed settings make it quick and easy to increase or decrease blowing force.
- Instant Idle Down and Instant Resume button allows the operator to instantly idle down when needed, and then quickly resume operation at the original setting.
- Control features make it easy to use the blower more efficiently, saving money on fuel and reducing overall noise on your course.
- Engine shutdown switch stops the engine at the press of a button.

The Durability You'd Expect From Turfco

- Closed-off deck dramatically reduces debris pickup from below the blower, decreasing wear on the turbine and minimizing overall dust and debris around the operator.
- Heavy-duty frame and rugged tongue for long-lasting durability.
- Hitch is adjustable to ensure proper alignment with a variety of vehicle heights.
- Heavy duty Donaldson air filter.

Specifications

Model	Torrent™ 2 Debris Blower (#85651)
Width	(Outside of tire to outside of tire): 48" (1.22 m)
Height	43.5" (1.10 m)
Length	(Hitch to end of chute): 108.8" (2.76 m)
Operator Controls	Wireless Hand-Held Remote Control for nozzle direction, engine speed and engine stop; Optional Auxiliary Manual Controls for engine speed and nozzle control
Nozzle Rotation	Full 360° in both directions
Towing Ground Speed	Suggested operating speed: 7 MPH (11.3 km/h); Maximum non-operation towing speed: 20 MPH (32 km/h)
Engine	725 cc (18.65 kW) KOHLER Command PRO® with electric start and 15 AMP charging. Donaldson air cleaner standard
Electrical	Requires 12V DC Battery; Electrical circuits for Wireless Remote Control and Nozzle Rotation Motor
Tongue and Hitch	Adjustable height pin hitch (Standard 5/8" pin)
Tongue Weight	35 pounds (15.8 kg)
Weight	575 pounds (260.8 kg)
Options	MagnaPoint™ Technology (#86504)

Specifications subject to change without notice.



Optional Onboard Control

This exclusive option proves invaluable if the wireless control is ever lost or destroyed. The operator simply flips a switch from wireless to auxiliary and can then control the machine's speed and direction.

Optional Onboard Controller (#86198)



Mete-R-Matic® Series | Setting the Standard in Topdressers.

For years the Turfco® name has been synonymous with topdressing. Turfco developed the first topdresser in 1961, and has been the leader ever since. Mete-R-Matic®, the best-known brand in topdressing, sets the standard for uniform application of topdressing with its simple, easy-to-use design. Just set your application rate and go, with confidence that each pass will be the same as the last.

Consistently Apply Wet or Dry Materials with Patented Continuous Chevron® Belt

The Mete-R-Matic®, featuring a patented Chevron® belt, is the first and only topdresser to ensure uniform application of all types of materials and varying



levels of moisture content, including wet sand. You can consistently apply a wide variety of topdressing mixtures such as sand, organic and inorganic compost, peat and humus, rye grass and rye blends, as well as crumb rubbers, gypsum, lime and calcine clays.



Eco-Friendly Patented Ground-Drive System

Turfco's Mete-R-Matic IV and XL topdressers utilize the same patented ground-drive system. When you speed up, slow down or cross uneven terrain, the conveyor belt and brush automatically adjust at the same rate to provide a consistent and even application every single time. No hydraulics, no pumps and no engines. Just hook up and go.



Light topdressing for frequent applications.



Medium topdressing for normal applications.



Heavy topdressing after plug aerification.



Self-propelled Mete-R-Matic for tight areas and small greens.



Mete-R-Matic® IV

Tow-Type Topdresser



Patented ground-drive system provides a consistent application every time.



Easy on/off switch.



Uniform application regardless of moisture content.

Designed to Handle Any Topdressing Program

Looking for a simple, versatile, all-around topdresser for all parts of your course...and all types of material? Choose the industry favorite Meter-R-Matic® IV.

- Ideal for golf greens, cultured grasses, sports turf and other areas sensitive to weight.
- Perfect for compost or other organic material application.
- All six wheels drive the machine for consistent application on uneven terrain.
- Wide hopper design is easily loaded with front-end loader or the Turfco® CR-10.
- Easily towed by turf truck vehicles.
- Proven, battle-tested design has been the standard of the industry since 1981.
- Galvanized hopper (no rusting—or potential rust flakes in topdress material).

Specifications

Model	Mete-R-Matic IV (#85424)
Drive	Wheels are driven by the ground; all six tires mechanically drive the conveyor and brush; no engine; no hydraulic system
Hopper Capacity	1 yd ³ (0.76 m ³)
Hopper Size	Top: 73 1/2" x 39 3/8" (1.87 m x 1.00 m) Bottom: 60" x 20" (1.5 m x 0.51 m) Depth: 19" (0.48 m)
Spreading Width	60" (1.5 m)
Topdressing Speed	Up to 8 MPH (12.8 km/h)
Transport Speed	Empty: up to 15 MPH (24 km/h) Loaded: up to 8 MPH (12.8 km/h)
Application	From very fine to 1/4" (6.5 mm)
Conveyor Belt	Wide rubber composition with patented Chevron belt 60" (1.5 m)
Metering Gate	Taintor gate design is easily adjusted and provides a uniform opening up to 2 1/4" (57 mm)
Brush	9" (228 mm) diameter, polypropylene bristle
Controls	Electric clutch actuator to engage conveyor and brush. Metering gate control for depth of application.
Clutch	The main clutch is a mechanical ratchet design actuated electrically from the operator's position on the tow vehicle.
Wheels & Tires	Six, 16" x 6.50" x 8" rib tread turf tires
Hitch	Heavy-duty pin hitch
Empty Weight	882 lb (400 kg)

METE-R-MATIC is a registered trademark of Turfco Manufacturing, Inc.

Mete-R-Matic® XL

Tow-Type Topdresser



Ground-drive system means no tow vehicle calibration required; just hook up and go.



Easy on/off switch.



Patented continuous Chevron belt ensures uniform application.

The Ultimate in Topdressing Productivity

At 2.25 cubic yards, the Mete-R-Matic® XL is ideal for large turf areas, less reloading and transportation increases efficiency. Just hook up and go.

- Patented ground-drive and Chevron® belt combines for the most consistent and uniform application in the industry.
- Patented Chevron belt can consistently handle all types of material such as compost, sand, peat, crumb rubber and calcine clays.
- Larger capacity hopper that can easily be filled with a front-end loader, requires fewer trips to refill.



Wide hopper capacity means less time reloading.

Specifications

Model	Mete-R-Matic XL (#85460)
Drive	Wheels are driven by the ground; all tires mechanically drive the conveyor and brush; no engine; no hydraulic system
Hopper Capacity	60.75 ft ³ (1.72 m ³ ; 2.25 yd ³), galvanized panels
Hopper Size	Top: 80" x 65.5" (2.03 m x 1.66 m) Bottom: 60" x 46" (1.5 m x 1.17 m) Depth: 19" (0.48 m)
Payload	6,000 lb (2,721 kg)
Spreading Width	60" (1.5 m)
Topdressing Speed	Up to 8 MPH (12.8 km/h)
Transport Speed	Up to 8 MPH (12.8 km/h)
Conveyor Belt	Wide rubber composition with patented Chevron belt 60" (1.5 m)
Metering Gate	Taintor gate design is easily adjusted and provides a uniform opening up to 2 ¼" (57 mm)
Brush	9" (228 mm) diameter, polypropylene bristle
Controls	Electrically operated clutch for conveyor and brush drive. Metering gate adjusted by hand.
Clutch	The main clutch is a mechanical ratchet design actuated electrically from the operator's position on the tow vehicle
Wheels & Tires	Two, 33" x 15.50" – 16.5" flotation tires
Hitch	Adjustable height clevis 1" pin hitch
Empty Weight	2,110 lb (957 kg) tow vehicle minimum 30 HP tractor (refer to Operator's Manual for additional requirements)
Electrical Requirements	12 volt DC, negative ground (<i>electrical power provided by tow vehicle</i>)

METE-R-MATIC is a registered trademark of Turfco Manufacturing, Inc.



Easily Maneuver Smaller Turf Areas and Tighter Greens

- Its light footprint is very helpful for new or refurbished greens, reducing the traffic of utility vehicles.
- Operator controls allow fingertip access to forward, reverse, brakes and throttle.
- New plastic guards with insulation for quieter operation.



Turfco's patented continuous Chevron® belt ensures uniform application of wet and dry materials.



A new control panel for operator convenience features forward and reverse, brakes and fingertip throttle control.



Galvanized hopper means no rusting—or potential rust flakes in topdress material.

Specifications

Model	Mete-R-Matic (#85417)
Engine	5.5 HP (4.04 kW) Honda® engine with recoil start
Drive	V-belt from engine, roller chain and gear drive to conveyor, traction and brush
Hopper Capacity	11.5 ft ³ (0.33 m ³), filled level at top of hopper, galvanized panels
Hopper Size	Top: 34 ½" x 39 ½" (0.87 m x 1.00 m) Bottom: 34 ½" x 21 ½" (0.87 m x 0.55 m) Depth: 19 ½" (0.50 m)
Spreading Width	31 ½" (0.8 m)
Topdressing Speed	Up to 2.5 MPH (4 km/h)
Transport Speed	Up to 2.5 MPH (4 km/h)
Conveyor Belt	34"-wide (0.86 m) composition belt with Chevron surface and heavy-duty polyester cord
Metering Gate	Fine adjustment to maximum 3" (76 mm) opening
Brush	9" (228 mm) diameter, polypropylene bristle
Control	Throttle, traction, reverse, brake, engine on/off switch, conveyor drive and metering gate controls; all within easy reach of the operator
Clutch	Dual, V-belt idler clutches for conveyor and traction
Wheels & Tires	Five, 13" x 6.50" x 6" rib thread turf tires
Weight	650 lb (295 kg)

Honda is a registered trademark of American Honda Motor Co.
METE-R-MATIC is a registered trademark of Turfco Manufacturing, Inc.



Four-wheel walking beam suspension.



Adjustable spinner angles—
up to 26° up or down.

The New CR-7 Makes Topdressing Even Easier by Combining Patented Technology with Built-In Versatility

- Cover more ground using less horsepower. The new CR-7 is designed to accommodate smaller equipment without sacrificing productivity.
- Features proven WideSpin™ technology to deliver your most accurate spread from light to heavy, wet or dry, and up to 40-feet wide.
- Self-cleaning galvanized hopper enhances efficiency when applying wet or dry material, including sand, lime, compost, stone, wood chips, soil conditioners and grass clippings.
- Easily access tighter areas with the optional rear-mounted cross-conveyor featuring a 180° swivel.
- Four-wheel dual walking beam suspension for low psi.
- Patented three-position switch assures a clean application every time by turning on the attachments before the main conveyor.
- Standard 3-year warranty keeps you up and running.

Specifications

Model	CR-7 (#85470)
Drive	Tractor's hydraulic system powers belt and attachments
Hopper Capacity	1.8 yd ³ (1.38 m ³)
Hopper	Galvanized steel
Spreading Width	15' to 40' (4.57 m to 12.19 m)
Transport Speed	Up to 15 MPH (24 km/h)
Topdressing Speed	Up to 7 MPH (11.3 km/h)
Conveyor Belt	18" (0.46 m) wide, pebble grain surface with heavy-duty polyester cord. Single seam.
Metering Gate	Full manual adjustment with curved gate
Controls	3-position, hand-held switch independently operates belt and attachments. Adjustable flow control sets speed of belt and attachments. Adjustable twin spinner sets angle for broadcast topdressing up to 26 degrees up or down.
Wheels & Tires	Four 26.5 x 14-12 4-ply turf tires with walking high beam suspension
Hitch	Heavy-duty pin hitch
Tractor Requirements	Minimum of 35 HP (26 kW) with one bank of hydraulics and 6 GPM flow
Empty Weight	1,450 lb (657 kg)
Dimensions	144" (3.6 m) long x 75" (1.9 m) wide x 65" (1.6 m) tall
Options	Material handler conveyor with swivel (#86181)
Warranty	3 years parts and labor

Specifications subject to change without notice.

Edge-R-Rite® II Edger



Minimal debris throwing decreases bunker clean up.

The Ultimate in Edging Versatility

- Greaseless bearings, heavy-duty arm and rugged design provide years of productivity.
- Eliminate shovel work for flowerbeds, tree rings or sidewalks.
- Unique blade action—cuts like a sod cutter without throwing debris.
- Safer than a rotary blade for heavy edging jobs.
- Increase tire life with drive casting and interchangeable tires.
- Available with the following blade options: right angle, 30° tree ring, V-trencher, circular and 3-inch sod cutter.



Excellent for maintaining clubhouse greens.




Specifications


Model	Edge-R-Rite II (#85304)
Engine	4-HP Honda®
Controls	Easy-to-reach depth-adjusting lever
Traction Assist Drive	Pinion drive on gear tread tire. Controlled from handlebar
Tires	Three semi-pneumatic tires. Heavy-duty 8" x 1.75"
Blade	Right angle blade standard. Other options available (additional cost)
Weight	106 lb (48.08 kg)
Dimensions	45" x 20" x 37" (114 cm x 50 cm x 94 cm)

Specifications subject to change without notice.


Blade Options




Right Angle.....#87104




30° Tree Ring#87111



V-trencher.....#87105



Circular.....#87107
Circular Kit.....#87110



3-inch Sod Cutter....#87106

CR-10 : Bring Your Ideas to Life With the Turfco® CR-10.



From relocating material and loading topdressers to filling bunkers or topdressing...whatever your project, the CR-10 covers your needs for renovation, construction and daily maintenance.

You apply and spread a wide variety of materials and topdressing mixes, so you need a piece of equipment that's versatile. You need the multifunctional Turfco® CR-10. It will quickly become the workhorse of your course.

Material handling needs can vary from maintaining and upgrading the primary features of your course—such

as greens, tees, fairways and sand traps—to improving secondary features like bunkers, cart paths, landscaping and the rough. The CR-10 helps you manage these tasks efficiently and effectively.

Spread virtually any wet or dry material with this topdresser and material handler, including sand, lime, compost, stone, wood chips, soil conditioners and grass clippings. The CR-10's large-capacity hopper and WideSpin™ Technology make it the perfect answer to all your golf course projects. In fact, the CR-10 is the only fairway topdresser and material handler with a three-year warranty.

Turfco CR-10 Application

- Rebuild tees
- Fill irrigation trenches
- Maintain & renovate cart paths
- Topdress fairways
- Fix washout areas
- Renovate bunkers
- Load topdressers
- Fill bunkers
- Topdress driving ranges
- Update flowerbeds
- Transfer material to hard-to-reach places
- Clean up after storms
- Back-fill drainage trenches
- Renovate greens
- Compost material



Unload 4-cubic-yards in as little as 30 seconds.



The swivel kit locks in any position or can be moved 180° by hand.



Cross conveyor with 180° swivel action allows you to place material right where you want it.



Light, medium, heavy and up to 20 ft to 40 ft wide with WideSpin technology.



Bring your CR-10 on the course for easy and efficient topdresser loading.

CR-10

Material Handler Fairway Topdresser



Rear-mounted cross conveyor with 180° swivel allows easy access to tight areas.

From patented technology to built-in versatility, the CR-10 is packed with innovation. Here are a few of the CR-10's unique advantages over other material handlers and topdressers:


- Dual-beam suspension provides lower center of gravity for maximum stability.
- "Fast Attach" system requires no tools when connecting attachments.
- Large, 4-cubic-yard self-cleaning galvanized hopper can be unloaded in less than 30 seconds.
- Unique frame design creates greater clearance for attachments—move around your course with ease and consistent stability.
- The rear of the CR-10 raises up to 6 ft for quick loading of topdressers, turf vehicles and spreaders.
- Low profile and light psi let you easily move large volumes of material.
- Spinners allow you to set the type of application you want—from very light to heavy—and broadcast width from 20 ft to 40 ft.



Patented 3-position switch gives you full control of the CR-10 and individual attachments.



WideSpin technology with 0-15° adjustable spinner angles broadcast from 20 ft to 40 ft.



Attachment flow control gives greater flexibility over topdressing applications and material placement.

Specifications

Model	CR-10 (#85441 without brakes) (#85440 with surge brakes)
Drive	Tractor's hydraulic system powers belt and attachments
Hopper Capacity	4 yd ³ (3.06 m ³)
Hopper	Galvanized steel panels
Transport Speed	Up to 8 MPH (12.8 km/h)
Topdressing Speed	Up to 6 MPH (9.6 km/h)
Conveyor Belt	32" (0.81 m) wide, pebble grain surface with heavy-duty polyester cord
Metering Gate	Full manual adjustment with the ability to fully open entire rear hopper panel
Controls	3-position switch independently operates belt and attachments. Adjustable flow control sets speed of belt and attachments. Adjustable twin spinner sets angle for broadcast topdressing
Wheels & Tires	Four 31" x 15.5"-15" turf tires
Hitch	Heavy-duty pin hitch
Tractor Requirements	Minimum of 35 HP (26 kW) with one bank of hydraulics and 9 GPM flow
Empty Weight	3,600 lb (1,630 kg)
Dimensions	185" (4.7 m) long x 84" (2.1 m) wide x 86" (2.2 m) tall
Options	Surge brakes on two wheels (#85440); Material handler conveyor (#86147); Swivel (#86149); Spinners for topdressing 20' (6.1 m) to 40' (12.2 m) wide (#86174)

Specifications subject to change without notice.



1655 101ST AVENUE NE
MINNEAPOLIS, MN 55449-4420
T: 800-679-8201 F: 763-785-0556

GET A DEMO TODAY | **TRY OUT TURFCO'S LATEST INNOVATIONS**



NEW TORRENT™ 2
[PG. 10]



NEW TRIWAVE™ 45
[PG. 5]



WIDESPIN™ 1550
[PG. 8]



METE-R-MATIC® XL
[PG. 14]



CR-7
[PG. 16]



CR-10
[PG. 18]

TURFCO.COM

Form No. 671067 Printed in U.S.A. ©Turfco Manufacturing Inc. 2018

