



TURFCO®

2020 PRODUCT CATALOG

The **Beauty**
of being more
Productive.





Hitting the century mark in a dynamic industry like this one is a major source of satisfaction for our family. It reminds us of what it takes to maintain and grow—the purpose, the pride and the passion this business requires. From our grandfather who started National Mower in 1919, to our father who launched Turfco. We recognize the privilege of being part of an industry where we all love what we do, and pledge to continue the tradition of bringing innovations to beautify the game. We look forward to working with you for the next century. **THANKS, THE KINKEAD FAMILY**



POSITIVELY uniform top dressing!

• FAST
• EASY
• MECHANICALLY PERFECT

**SOD-MASTER
METER-MATIC**
Powered
TOP DRESSER

Specifically designed for top dressing golf course greens and other cultured grasses

Does a far better job... cuts labor cost way down

Old man, equipped with a Meter-Matic, can do the work which formerly required a crew of men... and does a far better job! Practically eliminates post shipping and dust dragging operations. The patented design of the Meter-Matic does the top dressing into the turf, close to the root system where it is needed. Kneel growth, top around the Meter-Matic's wheels, are payable stock control and well-known head care.



Scott Kinkad
Executive VP

George Kinkad
President



The Turfco Product Line

As golf course maintenance practices have changed and grown, so has our product line. Your topdressing program is likely tailored to the specific needs and conditions of your course and we understand that no two golf courses are the same. Our expansive product line ensures that we have the right seeder, topdresser and material handler and debris blower for your specific program. With Turfco turf maintenance equipment, you'll have the freedom to focus on your program rather than trying to adapt your program to what your equipment can do. Take a look through this catalog to discover all the things you can accomplish on your course with Turfco equipment.

Three-Year Warranty

Turfco equipment is not only innovative, it is built to withstand the tough demands of day-to-day operations. That's why we offer an unprecedented three-year warranty against defects on all topdressers used for commercial applications. You won't find a better warranty from any other topdresser or material handling company in the industry. Period.



Worldwide Dealer Network

For a hands-on demonstration of any Turfco equipment, contact us today. We'll put you in touch with the Turfco dealer nearest you. Simply call us toll-free at **800-679-8201**.

TABLE OF CONTENTS

4 TriWave™ Series Overview	13 Mete-R-Matic® IV
5 TriWave™ 45 Overseeder	14 Mete-R-Matic® XL
6 TriWave™ 60 Overseeder	15 Mete-R-Matic® Self-Propelled
7-9 Widespin™ 1550 Topdresser	16-17 NEW! CR-15 Large Area Topdresser & Material Handler
10-11 Torrent™ 2 Debris Blower	18 NEW! CR-8 Topdresser & Material Handler
11 NEW! Torrent™ 2 PTO Debris Blower	19 Edge-R-Rite® II Edger
12 Mete-R-Matic® Series Overview	



TriWave™ Series: The Next Wave in Seeding is Here.



TriWave™ 45



TriWave™ 60

TriWave Working directly with golf course superintendents, Turfco® designed the innovative **TriWave™ 60 Overseeder**. In 2016 the innovation continued with the introduction of the **TriWave™ 45 Overseeder**. Now you can get enhanced seeding performance with an evolutionary model that hooks up to your favorite turf vehicle.

TriWave's 1½-inch seed spacing, combined with three independent floating heads, greatly increases germination by following the contours of the terrain for consistent seed depth. Its WaveBlade technology creates clean, optimal slit widths for better seed-to-soil contact while keeping turf disruption to a minimum. The patented delivery system

places seed directly into the slit, reducing waste while further increasing germination. And, seed depth can be infinitely adjusted in the field to suit the needs of each situation.

If you want to get great germination with less disruption, demo a TriWave Overseeder. As with the many superintendents who helped in its development, you'll find the TriWave truly makes a difference on your course.


- Patent-pending floating heads follow the ground contour—you won't miss the low spots or destroy the high spots or unmarked sprinkler heads.



- Patented seed delivery system puts seed directly into

the slit, reducing waste and increasing germination.


- Patented WaveBlade technology, counter-rotating at 900RPM, creates a clean, optimal square slit while minimizing turf disruption.
- Patented depth adjustment allows for infinite, in-field adjustment to suit your specific needs. No tools required.
- Close, 1½-inch spacing increases germination with fewer passes.




Allows cross-seeding with minimal disruption.



Patent-pending seed diverter increases germination by placing seed directly into the slit.




Traditional overseeders create a v-shaped slit, causing inconsistent contact that the seed has with the soil.



The TriWave maximizes seed to soil contact at the right depth with a square slit that quickly closes.



WaveBlade technology creates optimum clean slits, increasing seed-to-soil contact.



Minimal disruption to turf.

TriWave™ 45 Overseeder




Go Green Anywhere on Your Course

Damaged turf on your #7 tee? Weak areas on your #2 and #12 greens? Want to improve the overall stand of grass on your high traffic areas? With the TriWave™ 45, greening up your course has never been easier or quicker. You can go green now—you don't have to wait for the grass to come back next season. Just hook it up to your turf vehicle and quickly seed all your trouble spots in one trip. No tools are required to quickly adjust seed rates and depths to match the conditions you need. Now's the time to take your course to the next level.

- Hooks up to your favorite turf vehicle and seeds while you turn so you can follow greens, collars and contours. No tractor or PTOs required.
- Dual 18-inch floating heads follow the contour of the ground while the patented seed delivery system works with the WaveBlade technology to optimize seed-to-soil contact with minimal turf disruption.
- Close, 1½-inch spacing increases germination with fewer passes.
- Easy to switch out green blades and fairway blades.



Patented floating heads follow the contour of the ground, optimizing seed-to-soil contact for better germination.

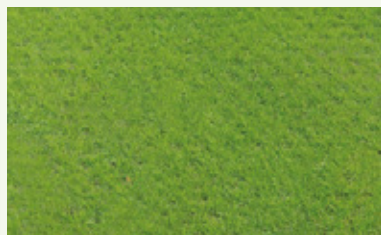

Proven 30 percent higher germination results vs traditional methods. Better germination with less seed.



Quick-adjust depth control allows you to get the right seed depth in varying conditions.

Specifications

Model	TriWave 45 Overseeder w/ Fairway Blades (comes standard) (#85858) TriWave 45 Overseeder w/ Green Blades (optional) (#85859)
Width	66" (1.67 m)
Height	56.5" (1.43 m)
Length	80.5" (2.05 m)
Capacity	3.2 ft³ (0.09 m³) Approx. 50 lb of grass seed
Application Pattern	Seed spacing 1 ½" (38.1 mm) apart
Application Width	40" (1.01 m)
Seed Gate	Automatic operation, adjustable variable opening
Ground Speed	Operating Speed: 3 MPH (4.8 km/h)
Transport Speed	Up to 6 MPH (9.6 km/h) (maximum)
Productivity	1.21 acres per hour at 3 MPH
Cutting Heads	2 heads, independently floating
Blade Assembly	2 WaveBlade sets, total 20 blades
Blade Assembly Operating Depth Range	0 to 1 ¾" (0 to 34.9 mm)
Engine	25 HP Briggs and Stratton Vanguard with electric start and 20 AMP charging system
Drive	Electric clutch with double groove V-belt
Hitch Type	Standard 5/8" pin, equipped with jackstand
Weight	1,070 lb (485 kg) <i>hopper empty</i>
Warranty	3 years
Optional	<ul style="list-style-type: none"> Hydraulic Power Kit (HPU) (hose kit not needed when equipped with HPU) (#86196) Hydraulic Hose Kit for use with Cushman Truck (#86505) Hydraulic Hose Kit for use with Toro or John Deere Trucks (#86506)



Specifications subject to change without notice.

TriWave™ 60 Overseeder



TriWave technology creates optimum slits for improved seed-to-soil contact, while minimizing turf disruption.



Cover More Ground with Better Germination Rates

Golf course superintendents told us they wanted a seeder with better germination rates, but minimal turf disruption. Four patents later, the TriWave™ 60 delivered on that promise. Three floating heads follow the contour of the ground while the unique seed delivery system works with the WaveBlade technology to optimize seed-to-soil contact for maximum germination rates—all while minimizing turf disruption.

- 60-inch application width combines with close, 1½-inch spacing to give you the most productive, high-germination rate seeder available.
- Depth adjuster allows you to adjust to varying conditions or seed types in the field without tools.
- Patented floating heads and WaveBlade technology combine to ensure you won't damage sprinkler heads or other unmarked items.



Depth adjuster allows you to adjust to varying conditions or seed types.



Unmarked items will be undamaged.



Floating heads follow the ground contour.

Specifications

Model	TriWave 60 Overseeder (#85851)
Width	74" (1.88 m)
Height	51" (1.3 m)
Length	40" (1.02 m) <i>without PTO shaft</i>
Capacity	4.77 ft³ (8,251 in³)
Application Pattern	Seed spacing 1 ½" (38.1 mm) apart
Application Width	60" (1.52 m)
Seed Gate	Manually operated, variable opening
Ground Speed	Up to 5.5 MPH (8.85 km/h)
Productivity	Up to 3 acres per hour
Cutting Heads	3 heads, independently floating
Blade Assembly	3 WaveBlade sets, total 30 blades
Blade Assembly Operating Depth Range	0 to 1 ¾" (0 to 34.9 mm)
Tractor/Horsepower Requirements	35 HP minimum to 60 HP maximum (26.1 kW to 44.7 kW)
Drive	540 PTO (tractor)
Hitch Type	Category 1 or Category 2, 3-pt. hitch
Weight	1,150 lb (521.6 kg) <i>hopper empty</i>
Maximum Weight with Seed Hopper Full	Approximately 1,250 lb (567 kg)
Warranty	3 years
Options	TriWave 3-Point Extension Kit



Specifications subject to change without notice.

WideSpin™ 1550 Broadcast Topdresser : The Best Spread in the Industry.



The Turfco Edge: The Innovation Continues

The *Turfco Edge* started with listening to what frustrates superintendents when it comes to topdressing. We heard they were tired of doing wheel-to-wheel spreads, overlapping spreads, dealing with complicated mechanical adjustments, and wasting time checking in with their crews to verify spread settings.

The **Widespin™ 1550** solves these problems, and more. Calculating and knowing your rates is easier. Adjusting settings is easier. Saving preferred settings is easier. Loading is easier. Topdressing greens, approaches and tees at the same time is easier. And getting the exact spread you want, every time, is easier.

WideSpin 1550 topdressers are available in truck-mounted and tow-behind models with engine or hydraulic power options. You can choose between electronic control or upgrade to our patented digital smart controller. Electronic control models are easy to use and offer good value for the money. Smart controller models offer rate calculation and four programmable presets for greatest productivity and labor savings.



All new hopper redesign increases capacity up to 20 percent and makes loading even easier with the widest hopper in the industry.



Adjustable spinner angled down for better turf penetration.



Ultra-light spread application.



Medium spread application.



Heavy spread application.

WideSpin™ 1550 | Broadcast Topdresser



Raising Your Game

We designed the WideSpin 1550 to help you achieve your agronomic goals, increase your staff productivity, and free up your time. With the labor challenges facing the industry, a superintendent's job has never been harder. Now you don't have to compromise your topdressing program. With Turfco's patented hydraulic system and spinner design, along with our smart controller, you can be confident you're getting the application you want every time.



Smart Controller
with Run Screen

Application
Calculator Screen



Productivity Advancements

Our unique design makes it easy to get whatever width and rate you want, without having to do mechanical adjustments. You can save your preferred applications into four programmable presets, changing widths and rates on the fly, increasing productivity, eliminating guesswork and freeing up your time.

- Get the exact spread you want as you move from greens to approaches to tees, at the push of a button.
- Know your application rates, calculate the rates you want, and determine how much material you need to budget — all for the first time ever with our on-board calculator.
- Reduce the number of passes and decrease traffic on your greens with WideSpin edge-to-edge applications.
- Drive topdressing down into the turf canopy by adjusting the spinner angle, minimizing the need for brushing and eliminating variations in moisture content (spreads the same wet or dry).
- Refill the hopper faster and with less spillage — galvanized hopper has 20% greater capacity and wider opening fits an 80" bucket.



Truck-mounted option designed to fit all major turf vehicles.



New hydraulic and spinner design makes the patented WideSpin technology even more versatile while delivering a consistent, even spread.


Save Time and Reduce Wear on Your Greens

Compared to other broadcast spreaders where you may have to do wheel-to-wheel applications for an even spread, the 1550 with Turfco's patented WideSpin™ technology allows you to complete even, edge-to-edge applications.

This gives you the opportunity to:

- Decrease the number of passes on your greens by up to 720 times per year* when compared to the wheel-to-wheel method.
- Improve productivity and save time; unique 30-foot wide, even spread makes it possible to cover an average-size green in two passes.
- Dramatically reduce traffic on your greens, reducing the potential for soil compaction and hydraulic leaks.

* 18 greens, 10 times a year

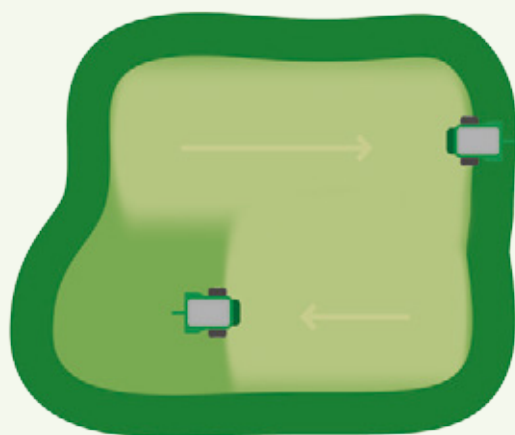

Turfco's WideSpin 1550 30-foot wide, even spread requires fewer passes.

Specifications

	TOW-BEHIND	TRUCK-MOUNTED
Model	ENGINE POWERED 1550 Smart Control (#85828) 1550 Electronic Control (#85829)	TORO, JOHN DEERE & JACOBSEN
	HYDRAULIC POWERED 1550 Smart Control (#85824) 1550 Electronic Control (#85825)	HYDRAULIC POWERED 1550 Smart Control (#85822) 1550 Electronic Control (#85823)
Engine	Engine Powered: 13 HP Briggs and Stratton Hydraulic Powered: n/a	n/a
Operator Control	Smart: 3-position switch; 4 programmable presets; onboard rate calculator; instantaneous belt and spinner speed control; instant throttle down control (Engine Powered) Standard Electronic: 3-position switch with manual control for spinner and belt speed	Smart: 3-position switch; 4 programmable presets; onboard rate calculator; instantaneous belt and spinner speed control Standard Electronic: 3-position switch with manual control for spinner and belt speed
Empty Weight	Engine Powered: 1,324 lbs (601 kg) Hydraulic Powered: 1,021 lbs (463 kg)	710 lbs without mounting kit (322 Kg)
Hopper Capacity	21 ft ³ (0.59 m ³) struck level; 25 ft ³ (0.71 m ³) heaped	
Hopper Size	80" x 36.5" (2.03 x 0.92 m) at the top	
Spreading Width	12' up to 40' (2.7 up to 12 m)	
Spread Application	0.45 ft ³ per 1,000 ft ³ up to 12 ft ³ per 1,000 ft ³ using patented WideSpin Technology	
Topdressing Speed	Up to 8 MPH (12.8 km/h)	
Transport Speed	Up to 8 MPH (12.8 km/h)	
Conveyor Belt	18" (0.46 m) wide pebble surface composition with heavy duty polyester cord	
Metering Gate	Manually operated with Light Spread/Heavy Spread Calibrations	
Drive	Engine Powered: Engine Powered Hydraulics Hydraulic Powered: Tow Vehicle Powered Hydraulics	Truck Powered Hydraulics
Wheels	4 Ply 26.5 x 14.00 x 12 Turf	n/a
Warranty	3 years	
Options	Trench Filling Attachment (#86150) Cross Conveyor Attachment (#86181)	Trench Filling Attachment (#86150) Cross Conveyor Attachment (#86181) Storage Stand (#86197)



Specifications subject to change without notice.

Torrent™ 2 Debris Blower | The Standard in Blower Productivity.



TORRENT 2

Designed from the ground up with input from golf course superintendents, sports field managers and grounds managers, the Turfco® Torrent™ 2 Debris Blower takes cleanup to a new level of productivity. The powerful, patented Torrent 2 delivers unprecedented control over air speed, air direction, noise management and fuel

consumption. It is a precision cleanup tool you can use year-round to give your course a new level of polish and playability.




The Turfco Torrent 2 blower features a faster, more precise nozzle rotation that's operated by a handheld controller to dramatically increase operator productivity. The wireless controller includes a unique idle/resume button and the ability to adjust air speed

settings. Designed by Turfco, the Torrent 2's turbine generates powerful air volume and superior air velocity. From grass clippings and aeration cores on the course to leaves and pine needles in the parking lot, nothing stands in its way.

Learn how greater precision and control can make a blower more productive. Ask for a demo and compare the Turfco Torrent 2 to your current blower.

Save Hours a Day with MagnaPoint™ Technology

DISTANCE EFFICIENCY

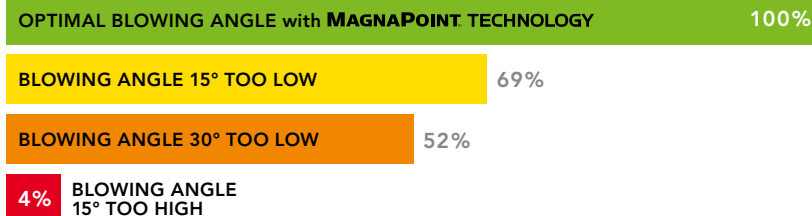

Patented MagnaPoint™ Technology ensures your operator gets the most productive angle at every pass.

- On-board reference lets you select the optimal setting for the debris you are blowing
- Slide the magnetic stops to that angle
- Handheld controller allows operator to switch nozzle direction on the fly
- The optimum blower angle each and every time
 - » Maximizes productivity
 - » Saves time
 - » Limits noise
 - » Reduces fuel consumption



OPTION – MagnaPoint™ Technology eliminates guessing with the optimum blower angle every time.

Torrent™ 2 & Torrent™ 2 PTO

Debris Blower



Aeration plugs on the fairway, leaves in the parking lot, debris doesn't stand a chance



Wireless handheld controller equipped with unique, time-saving idle/resume button. (Model #85651)



Donaldson air filter.



Optional auxiliary controller ensures you're always operational.



NEW PTO model.

The Best in Productivity and Durability

- Super fast nozzle rotation speed dramatically increases productivity — no need to slow down to wait for the nozzle at the end of each turn.
- Multiple air speed settings make it quick and easy to adjust blowing force.
- Instantly access power when you want it, or drop down to idle when you don't. Patented Instant Idle Down/Resume button saves on fuel consumption and reduces noise.
- Engine shutdown switch stops the engine at the press of a button.
- Closed-off deck dramatically reduces debris pickup, decreasing wear on the turbine.
- Heavy-duty frame, rugged tongue and adjustable hitch.
- Exclusive option keeps you operational if the wireless control is ever lost or misplaced. Simply flip a switch to control machine speed and direction.

NEW PTO Model Available

Now you can get the same air power, rugged durability and time-saving features of the Torrent 2 in a tractor-mounted PTO model.

- Optional MagnaPoint Technology for maximum productivity.
- Connects to tractors with minimum 20 horsepower.
- Offers maneuverability, quiet operation and engine-free maintenance.

Specifications

Model	Torrent™ 2 Debris Blower (#85651)
Width	(Outside of tire to outside of tire): 48" (1.22 m)
Height	43.5" (1.10 m)
Length	(Hitch to end of chute): 108.8" (2.76 m)
Operator Controls	Wireless Hand-Held Remote Control for nozzle direction, engine speed and engine stop; Optional Auxiliary Manual Controls for engine speed and nozzle control
Nozzle Rotation	Full 360° in both directions
Towing Ground Speed	Suggested operating speed: 5 MPH (8 km/h); Maximum non-operation towing speed: 20 MPH (32 km/h)
Engine	725 cc (18.65 kW) KOHLER Command PRO® with electric start and 15 AMP charging. Donaldson air cleaner standard
Electrical	Requires 12V DC Battery; Electrical circuits for Wireless Remote Control and Nozzle Rotation Motor
Tongue and Hitch	Adjustable height pin hitch (Standard 5/8" pin)
Tongue Weight	35 pounds (15.8 kg)
Weight	575 pounds (260.8 kg)
Options	MagnaPoint™ Technology (#86504) Auxiliary Manual Controls (#85651)

Model	NEW Torrent™ 2 PTO Debris Blower (#85856)
Width / Length	29" (0.79 m) wide / 71" (1.80 m) long
Height	(Nozzle up): 32.5" (0.83 m), (no nozzle): 29.5" (0.75 m)
Weight	339 lbs (153.8 kg)
Gearbox	1:7 ratio
PTO Power / PTO Shaft	20 hp (14.9 KW) MIN / 1-3/8" -6 spline, 540 rpm MAX
3pt Hitch	(Top link): 3/4" pin (class I) (Bottom link): 7/8" or 1-1/8" pin (class I or II)
Nozzle Motor	Connects to 12V DC tractor battery
Options	MagnaPoint™ Technology (#86513)




Specifications subject to change without notice.

Mete-R-Matic® Series | Setting the Standard in Topdressers.

For years the Turfco® name has been synonymous with topdressing. Turfco developed the first topdresser in 1961, and has been the leader ever since. Mete-R-Matic®, the best-known brand in topdressing, sets the standard for uniform application of topdressing with its simple, easy-to-use design. Just set your application rate and go, with confidence that each pass will be the same as the last.

Consistently Apply Wet or Dry Materials with Patented Continuous Chevron® Belt

The Mete-R-Matic®, featuring a patented Chevron® belt, is the first and only topdresser to ensure uniform application of all types of materials and varying



levels of moisture content, including wet sand. You can consistently apply a wide variety of topdressing mixtures such as sand, organic and inorganic compost, peat and humus, rye grass and rye blends, as well as crumb rubbers, gypsum, lime and calcine clays.



Eco-Friendly Patented Ground-Drive System

Turfco's Mete-R-Matic IV and XL topdressers utilize the same patented ground-drive system. When you speed up, slow down or cross uneven terrain, the conveyor belt and brush automatically adjust at the same rate to provide a consistent and even application every single time. No hydraulics, no pumps and no engines. Just hook up and go.



Light topdressing for frequent applications.




Medium topdressing for normal applications.



Heavy topdressing after plug aerification.



Self-propelled Mete-R-Matic for tight areas and small greens.

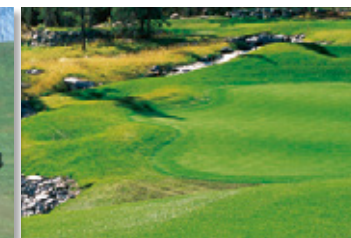

Mete-R-Matic® IV

Tow-Type Topdresser



Patented ground-drive system provides a consistent application every time.



Easy on/off switch.



Uniform application regardless of moisture content.

Designed to Handle Any Topdressing Program

Looking for a simple, versatile, all-around topdresser for all parts of your course...and all types of material? Choose the industry favorite Mete-R-Matic® IV.

- Ideal for golf greens, cultured grasses, sports turf and other areas sensitive to weight.
- Perfect for compost or other organic material application.
- All six wheels drive the machine for consistent application on uneven terrain.
- Wide hopper design is easily loaded with front-end loader or the Turfco® CR-15.
- Easily towed by turf truck vehicles.
- Proven, battle-tested design has been the standard of the industry since 1981.
- Galvanized hopper (no rusting—or potential rust flakes in topdress material).

Specifications

Model	Mete-R-Matic IV (#85424)
Drive	Wheels are driven by the ground; all six tires mechanically drive the conveyor and brush; no engine; no hydraulic system
Hopper Capacity	1 yd ³ (0.76 m ³)
Hopper Size	Top: 73 ½" x 39 ¾" (1.87 m x 1.00 m) Bottom: 60" x 20" (1.5 m x 0.51 m) Depth: 19" (0.48 m)
Spreading Width	60" (1.5 m)
Topdressing Speed	Up to 8 MPH (12.8 km/h)
Transport Speed	Empty: up to 15 MPH (24 km/h) Loaded: up to 8 MPH (12.8 km/h)
Application	From very fine to ¼" (6.5 mm)
Conveyor Belt	Wide rubber composition with patented Chevron belt 60" (1.5 m)
Metering Gate	Taintor gate design is easily adjusted and provides a uniform opening up to 2 ¼" (57 mm)
Brush	9" (228 mm) diameter, polypropylene bristle
Controls	Electric clutch actuator to engage conveyor and brush. Metering gate control for depth of application.
Clutch	The main clutch is a mechanical ratchet design actuated electrically from the operator's position on the tow vehicle.
Wheels & Tires	Six, 16" x 6.50" x 8" rib tread turf tires
Hitch	Heavy-duty pin hitch
Empty Weight	882 lb (400 kg)
Warranty	3 years



METE-R-MATIC is a registered trademark of Turfco Manufacturing, Inc.

Mete-R-Matic® XL


Tow-Type Topdresser



Ground-drive system means no tow vehicle calibration required; just hook up and go.



Easy on/off switch.



Patented continuous Chevron belt ensures uniform application.

The Ultimate in Topdressing Productivity

At 2.25 cubic yards, the Mete-R-Matic® XL is ideal for large turf areas, less reloading and transportation increases efficiency. Just hook up and go.

- Patented ground-drive and Chevron® belt combines for the most consistent and uniform application in the industry.
- Patented Chevron belt can consistently handle all types of material such as compost, sand, peat, crumb rubber and calcine clays.
- Larger capacity hopper that can easily be filled with a front-end loader, requires fewer trips to refill.



Wide hopper capacity means less time reloading.

Specifications

Model	Mete-R-Matic XL (#85460)
Drive	Wheels are driven by the ground; all tires mechanically drive the conveyor and brush; no engine; no hydraulic system
Hopper Capacity	60.75 ft ³ (1.72 m ³ ; 2.25 yd ³), galvanized panels
Hopper Size	Top: 79" x 65" (2.0 m x 1.7 m) Bottom: 60" x 46" (1.5 m x 1.17 m) Depth: 19" (0.48 m)
Payload	6,000 lb (2,721 kg)
Spreading Width	60" (1.5 m)
Topdressing Speed	Up to 8 MPH (12.8 km/h)
Transport Speed	Up to 8 MPH (12.8 km/h)
Conveyor Belt	Wide rubber composition with patented Chevron belt 60" (1.5 m)
Metering Gate	Taintor gate design is easily adjusted and provides a uniform opening up to 2 1/4" (57 mm)
Brush	9" (228 mm) diameter, polypropylene bristle
Controls	Electrically operated clutch for conveyor and brush drive. Metering gate adjusted by hand.
Clutch	The main clutch is a mechanical ratchet design actuated electrically from the operator's position on the tow vehicle
Wheels & Tires	Two, 33" x 15.50" – 16.5" flotation tires
Hitch	Adjustable height clevis 1" pin hitch
Tractor Requirements	Minimum of 30 HP (22.4 kW)
Empty Weight	2,110 lb (957 kg)
Electrical Requirements	12 volt DC, negative ground (<i>electrical power provided by tow vehicle</i>)
Warranty	3 years



METE-R-MATIC is a registered trademark of Turfco Manufacturing, Inc.



Easily Maneuver Smaller Turf Areas and Tighter Greens

- Its light footprint is very helpful for new or refurbished greens, reducing the traffic of utility vehicles.
- Operator controls allow fingertip access to forward, reverse, brakes and throttle.
- New plastic guards with insulation for quieter operation.



Turfco's patented continuous Chevron® belt ensures uniform application of wet and dry materials.



A new control panel for operator convenience features forward and reverse, brakes and fingertip throttle control.



Galvanized hopper means no rusting—or potential rust flakes in topdress material.

Specifications

Model	Mete-R-Matic (#85417)
Engine	5.5 HP (4.04 kW) Honda® engine with recoil start
Drive	V-belt from engine, roller chain and gear drive to conveyor, traction and brush
Hopper Capacity	11.5 ft³ (0.33 m³), filled level at top of hopper, galvanized panels
Hopper Size	Top: 34 ½" x 39 ½" (0.87 m x 1.00 m) Bottom: 34 ½" x 21 ½" (0.87 m x 0.55 m) Depth: 19 ½" (0.50 m)
Spreading Width	31 ½" (0.8 m)
Topdressing Speed	Up to 2.5 MPH (4 km/h)
Transport Speed	Up to 2.5 MPH (4 km/h)
Conveyor Belt	34"-wide (0.86 m) composition belt with Chevron surface and heavy-duty polyester cord
Metering Gate	Fine adjustment to maximum 3" (76 mm) opening
Brush	9" (228 mm) diameter, polypropylene bristle
Control	Throttle, traction, reverse, brake, engine on/off switch, conveyor drive and metering gate controls; all within easy reach of the operator
Clutch	Dual, V-belt idler clutches for conveyor and traction
Wheels & Tires	Five, 13" x 6.50" x 6" rib thread turf tires
Empty Weight	650 lb (295 kg)
Warranty	3 years




Honda is a registered trademark of American Honda Motor Co.
METE-R-MATIC is a registered trademark of Turfco Manufacturing, Inc.

CR-15 Putting a New Spin on Productivity.



Introducing the new CR-15 Large Area Topdresser & Material Handler

Our largest capacity product, the CR-15 combines unprecedented productivity and precision topdressing into one workhorse of a machine. It frees up your time and gives you the confidence knowing you're meeting your agronomic goals. One season with the CR-15 and you'll wonder how you ever got by without it.

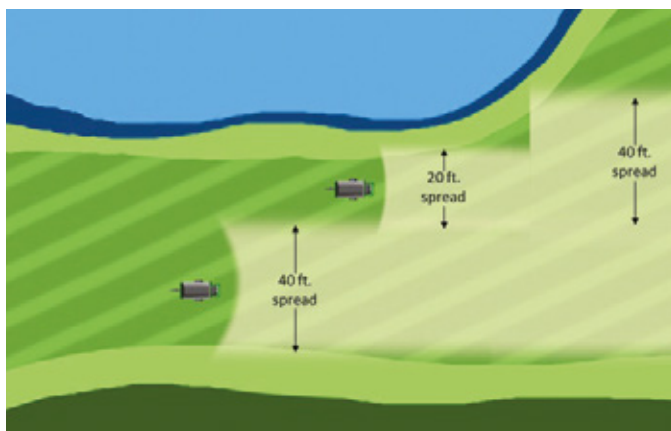

Easily adjust spread widths while keeping the same material rates, saving on material costs and labor.

Precise & Productive

The CR-15 revolutionizes fairway and large area topdressing, in the same way the WideSpin 1550 does for greens. It comes equipped with a digital smart controller that gives superintendents the ability to calculate their preferred rates then lock in rates and widths into four savable pre-sets. Operators can switch between presets on the fly for greater productivity.

The edge-to-edge spread capability offers a consistent application that's pinpoint accurate, eliminating waste. Miscalculating a spread by five feet off the fairways can add up to 4 hopper loads or more. Areas needing heavier applications like landing zones can be handled with the push of a button.

Backed by a 3-year warranty, the CR-15 doubles as an all-purpose construction and renovation machine. Quickly load other topdressers, turf vehicles and spreaders or move around the course. Use it on a daily basis for everything from renovating bunkers and filling ditches to fixing washout areas.

Turfco CR-15 Applications

- Topdress fairways
- Load topdressers
- In-house construction
- Renovate bunkers
- Fill irrigation trenches
- Transfer material to hard-to-reach places
- Fix washout areas
- Rebuild tees



The swivel kit locks in any position or can be moved 180° by hand.

Our Smart Controller Delivers

- Lock in preferred rates and widths into four savable presets
- Switch between presets on the go, never leaving the seat
- Instantly adjust to heavier rates for landing zones or drainage areas
- Switch from narrow to wide widths while maintaining the same rate
- Input square footage and desired rate to calculate material amount
- Controller covered under 3-Year Warranty



Unload 4-cubic-yards
in as little as 30 seconds.



Bring your CR-15 on the course for easy
and efficient topdresser loading.



Cross conveyor with 180° swivel action allows
you to place material right where you want it.

Unique Design Features

- Dual-beam suspension and lower center of gravity for more stability.
- 'Fast Attach' System: No tools for connecting attachments.
- Unique frame design keeps tongue weight consistent with shifting loads and provides greater clearance for attachments. No need to lift rear of unit to transport.
- Rear end raises up to 6-ft-quicker loading of other vehicles and carriers.
- Low profile, light PSI for easy handling of large volumes.
- Self-cleaning hopper keeps wide range of material flowing freely.



Light, medium and heavy spreads from 15
to 45 ft wide with WideSpin technology.

Specifications

Model	CR-15 (#85442 without brakes) (#85443 with surge brakes)
Drive	Tractor's hydraulic system powers belt and attachments
Hopper Capacity	4 yd ³ (3.06 m ³)
Hopper	Galvanized steel panels
Transport Speed	Up to 15 MPH (24 km/h) empty Up to 8 MPH (12.8 km/h) loaded
Topdressing Speed	Up to 6 MPH (9.6 km/h)
Conveyor Belt	32" (0.81 m) wide, pebble grain surface with heavy-duty polyester cord
Metering Gate	Full manual adjustment with the ability to fully open entire rear hopper panel
Smart Control	3-position switch; 4 programmable presets; onboard rate calculator; instantaneous belt and spinner speed control
Wheels & Tires	Four 31" x 15.5"-15" turf tires
Hitch	Heavy-duty, adjustable height pin hitch
Tractor Requirements	Minimum of 40 HP (29.4 kW) with one bank of hydraulics
Empty Weight	3,600 lb (1,630 kg)
Dimensions	185" (4.7 m) long x 84" (2.1 m) wide x 86" (2.2 m) tall (lowered), 91" (2.3 m) tall (raised)
Warranty	3 years
Optional Attachments	Conveyor Attachment (#86147) Conveyor Attachment Swivel (#86149) WideSpin Spinner Attachment (#86300)



Specifications subject to change without notice.

NEW



Four-wheel walking beam suspension.



Adjustable spinner angles—up to 26° up or down.



New hydraulic system gives greater control over widths and rates.

The CR-8 Makes Topdressing Even Easier by Combining Patented Technology with Built-In Versatility

- The CR-8 is perfect for sports fields and golf courses when you need more capacity without using a larger tractor.
- New larger capacity 2.0 yd³ self-cleaning galvanized hopper easily spreads wet or dry material, including sand, lime, compost, stone, wood chips, soil conditioners and grass clippings.
- New hydraulic controls, combined with WideSpin™ technology, give you greater control and wider range of applications to deliver your most accurate spread from light to heavy, wet or dry, and up to 45-feet wide.
- Reduce the number of passes and decrease traffic with even edge-to-edge applications.
- Drive topdressing down into the turf canopy by adjusting the spinner angle, minimizing the need for brushing and eliminating variations in moisture content (spreads the same wet or dry).
- Four-wheel dual walking beam suspension for low psi.
- Standard 3-year warranty keeps you up and running.

Specifications

Model	CR-8 (#85473)
Drive	Tractor's hydraulic system powers belt and attachments
Hopper Capacity	2.0 yd ³ (1.54 m ³)
Hopper	Galvanized steel
Spreading Width	12' to 40' (3.6 m to 12 m)
Transport Speed	Up to 8 MPH (12.8 km/h)
Topdressing Speed	Up to 8 MPH (12.8 km/h)
Conveyor Belt	18" (0.46 m) wide, pebble grain surface with heavy-duty polyester cord. Single seam.
Metering Gate	Full manual adjustment with curved gate
Controls	Patented 3-position switch with belt and spinner control and manually adjusted hydraulic speeds
Wheels & Tires	Four 26.5 x 14-12 4-ply turf tires with walking high beam suspension
Hitch	Heavy-duty pin hitch
Tractor Requirements	Minimum of 30 HP (22.4 kW) with one bank of hydraulics and 6 GPM flow
Empty Weight	1,421 lb (644 kg)
Dimensions	144" (3.6 m) long x 75" (1.9 m) wide x 67" (1.7 m) tall
Options	Material handler conveyor with swivel (#86181)
Warranty	3 years



Specifications subject to change without notice.

Edge-R-Rite® II

Edger



Minimal debris throwing decreases bunker clean up.

The Ultimate in Edging Versatility

- Greaseless bearings, heavy-duty arm and rugged design provide years of productivity.
- Eliminate shovel work for flowerbeds, tree rings or sidewalks.
- Unique blade action—cuts like a sod cutter without throwing debris.
- Safer than a rotary blade for heavy edging jobs.
- Increase tire life with drive casting and interchangeable tires.
- Available with the following blade options: right angle, 30° tree ring, V-trencher, circular and 3-inch sod cutter.



Excellent for maintaining beautiful landscaping.




Specifications

Model	Edge-R-Rite II (#85304)
Engine	4-HP Honda®
Controls	Easy-to-reach depth-adjusting lever
Traction Assist Drive	Pinion drive on gear tread tire. Controlled from handlebar
Tires	Three semi-pneumatic tires. Heavy-duty 8" x 1.75"
Blade	Right angle blade standard. Other options available (additional cost)
Weight	106 lb (48.08 kg)
Dimensions	45" x 20" x 37" (114 cm x 50 cm x 94 cm)
Warranty	3 years




Specifications subject to change without notice.


Blade Options




Right Angle.....#87104



30° Tree Ring#87111




V-trencher.....#87105



Circular.....#87107

Circular Kit.....#87110



3-inch Sod Cutter....#87106



1655 101ST AVENUE NE
MINNEAPOLIS, MN 55449-4420
T: 800-679-8201 F: 763-785-0556

See how Turfco can help with your labor challenges.

New for 2020!

Torrent™2 PTO Debris Blower
CR-8 Topdresser & Material Handler
CR-15 Topdresser & Material Handler

GET A DEMO TODAY 800.679.8201 | CHECK OUT TURFCO'S LATEST INNOVATIONS



NEW! TORRENT™ 2 PTO



TRIWAVE™ 45



WIDESPIN™ 1550



METE-R-MATIC® XL



NEW! CR-8



NEW! CR-15

TURFCO.COM

Form No. 617862 Printed in U.S.A. ©Turfco Manufacturing Inc. 2020

